

## Hinged devices

**Publication number:** GB2224309

**Publication date:** 1990-05-02

**Inventor:** HUTCHINSON PAUL JAMES

**Applicant:** BXL PLASTICS LTD (GB)

**Classification:**

- **international:** **B65D47/08; E05D1/02; B65D47/08; E05D1/00; (IPC1-7): B65D47/08; E05D1/02**

- **europaean:** **B65D47/08B1A; E05D1/02**


**Application number:** GB19890024115 19891026

**Priority number(s):** GB19880025141 19881027

Report a data error here

### Abstract of GB2224309

A hinged device such as a closure for a container with a first hinge member (2) hinged to a second hinge member (3) through a flexible web (4) defining a first hinge axis, and a flexibly resilient link (7) connecting the first and second hinge members and providing by a toggle action the hinged members with first and second at-rest-positions on either side of an intermediate position is characterised in that the link has two flexing axes (7a, 7b) spaced from its ends and parallel to the first hinge axis permitting said link to resiliently flex in opposite directions. The second at-rest-position is shown while in the first at-rest-position the link lies to the left of the hinge web (4) but the member (2) is still in a raised position to indicate that the orifice (6) has not been sealed and the member (2) must be moved further to the closed position.

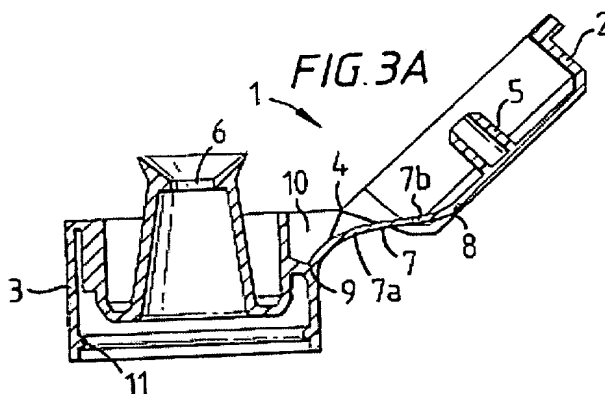

Data supplied from the esp@cenet database - Worldwide

BEST AVAILABLE COPY